
WALK-IN CLOSET

DESIGN OPTION 2

Concept design, dimensions, bill of quantities & sliding-door system

13 September 2026

ROOM	CUPBOARD RUN	CLEAR WALKWAY	EST. MATERIALS
3890 x 2260 mm	3600 mm / side	1260 mm	R26,951

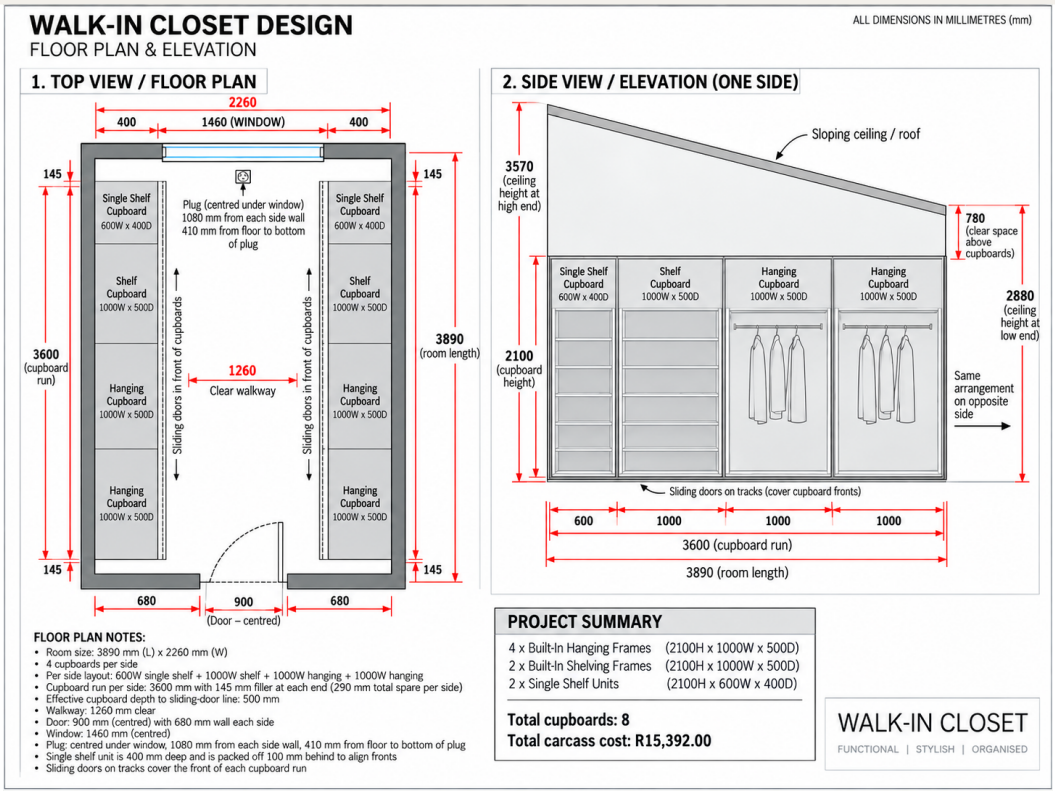

Design overview

This option uses doorless UCAN carcasses on both long walls, with a continuous sliding-door facade mounted in front of each 3.6 m cupboard bank. The arrangement is symmetrical on both sides and is designed to maximise storage while retaining a comfortable central walkway.

Dimension / feature	Design value
Room internal size	3890 mm long x 2260 mm wide
Ceiling / roof	3570 mm high end -> 2880 mm low end
Cupboard height	2100 mm
Cupboard run per side	3600 mm
Clear walkway	1260 mm
Door	900 mm centred; 680 mm wall each side
Window	1460 mm centred; 400 mm wall each side
Spare wall length	290 mm per side run; approx. 145 mm at each end

Cupboard arrangement per side

600 mm single-shelf unit + 1000 mm shelving unit + 1000 mm hanging unit + 1000 mm hanging unit = 3600 mm. The same sequence is mirrored on the opposite wall. The 600 mm single-shelf unit is 400 mm deep, so it should be packed off by approximately 100 mm at the rear to align its front face with the 500 mm-deep carcasses and the sliding-door line.

Sliding-door arrangement

Use one 3.6 m white Leroy Merlin track set on each cupboard bank. The working design assumes four sliding panels per side, eight panels in total. Assemble, level and anchor the cupboards first; then use a continuous top and bottom mounting strip before fixing the tracks so the rails remain straight across the carcass joints.

WORKING MATERIALS BUDGET: R26,951 | CUPBOARD CARCASSES: R15,392

Bill of quantities

Prices below are the working estimate used in the previous report and should be rechecked immediately before ordering. The product names are clickable purchase links.

Item	Qty	Unit	Total
UCAN built-in hanging carcass, 1000W x 500D x 2100H	4	R1,799	R7,196
UCAN built-in shelving carcass, 1000W x 500D x 2100H	2	R2,699	R5,398
UCAN narrow 5-shelf unit, 600W x 400D x 2100H	2	R1,399	R2,798
Leroy Merlin white 3.6 m sliding-door track set	2	R1,269	R2,538
Sliding-door roller/guide hardware set	8	R399	R3,192
16 mm Picco White melamine, 2750 x 1830 mm	8	R638	R5,104
White pre-glued edging, 5 m roll	11	R23	R253
Oslo 128 mm matt-black door pull	8	R35	R280
4 x 50 mm chipboard screws, 40-pack	2	R56	R112
Wall fixing / anchor pack	1	R80	R80
ESTIMATED MATERIAL TOTAL			**R26,951**

Important purchasing and installation notes

• The 3.6 m Leroy Merlin track is dimensionally suited to each 3.6 m cupboard bank.
• Confirm the roller / guide hardware is compatible with the Optimum 3.6 m track before buying all eight sets.
• Do not cut the sliding-door panels to final size until the carcasses are assembled, levelled, fixed and the track positions have been measured.
• Allow a 100 mm rear spacer / fixing frame behind the 600 mm shelf unit so its front aligns with the 500 mm-deep carcasses.
• The estimate excludes delivery, cutting / edging labour, installation labour, dressing table, mirror, ottoman and lighting.
• Stock and prices can change. This is a concept and procurement guide, not a fabrication drawing.


Recommended contingency: allow approximately R1,000-R1,500 over the material total for cutting, edging, minor fasteners, packers and unforeseen fittings. A sensible working allowance is therefore approximately **R28,000-R29,000**, excluding labour and delivery.

WALK-IN CLOSET DESIGN

FLOOR PLAN & ELEVATION

ALL DIMENSIONS IN MILLIMETRES (mm)


1. TOP VIEW / FLOOR PLAN

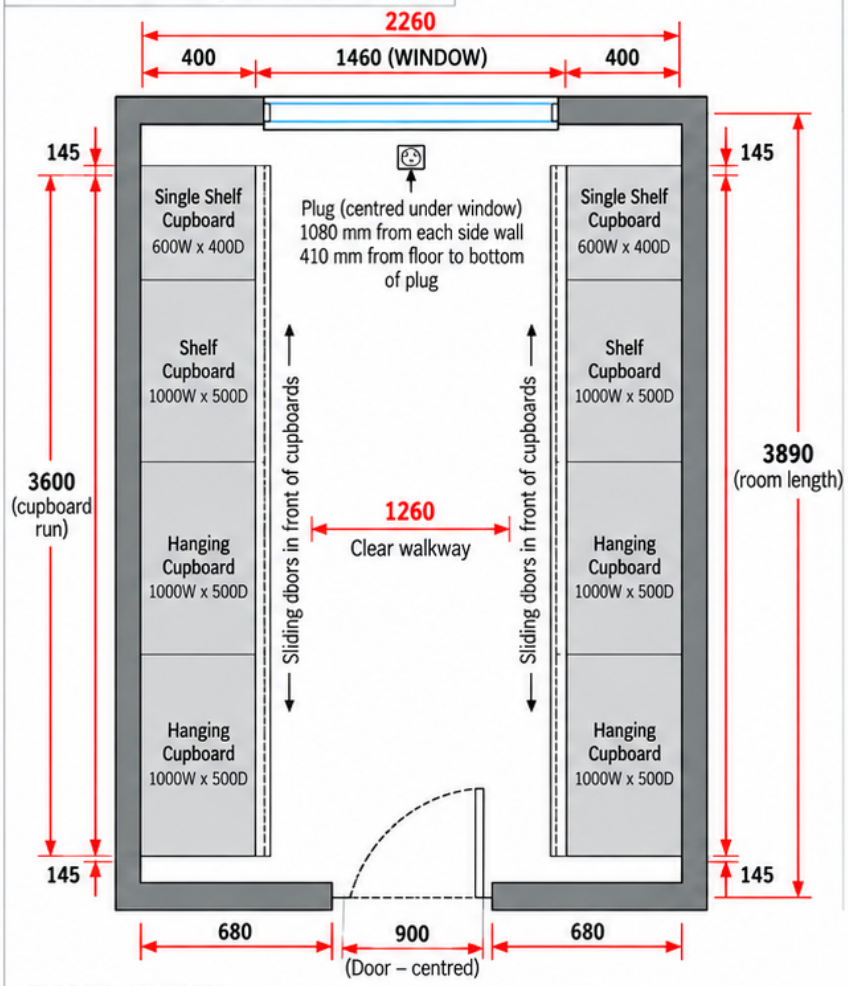

FLOOR PLAN NOTES:

- Room size: 3890 mm (L) x 2260 mm (W)
- 4 cupboards per side
- Per side layout: 600W single shelf + 1000W shelf + 1000W hanging + 1000W hanging
- Cupboard run per side: 3600 mm with 145 mm filler at each end (290 mm total spare per side)
- Effective cupboard depth to sliding-door line: 500 mm
- Walkway: 1260 mm clear
- Door: 900 mm (centred) with 680 mm wall each side
- Window: 1460 mm (centred)
- Plug: centred under window, 1080 mm from each side wall, 410 mm from floor to bottom of plug
- Single shelf unit is 400 mm deep and is packed off 100 mm behind to align fronts
- Sliding doors on tracks cover the front of each cupboard run

2. SIDE VIEW / ELEVATION (ONE SIDE)

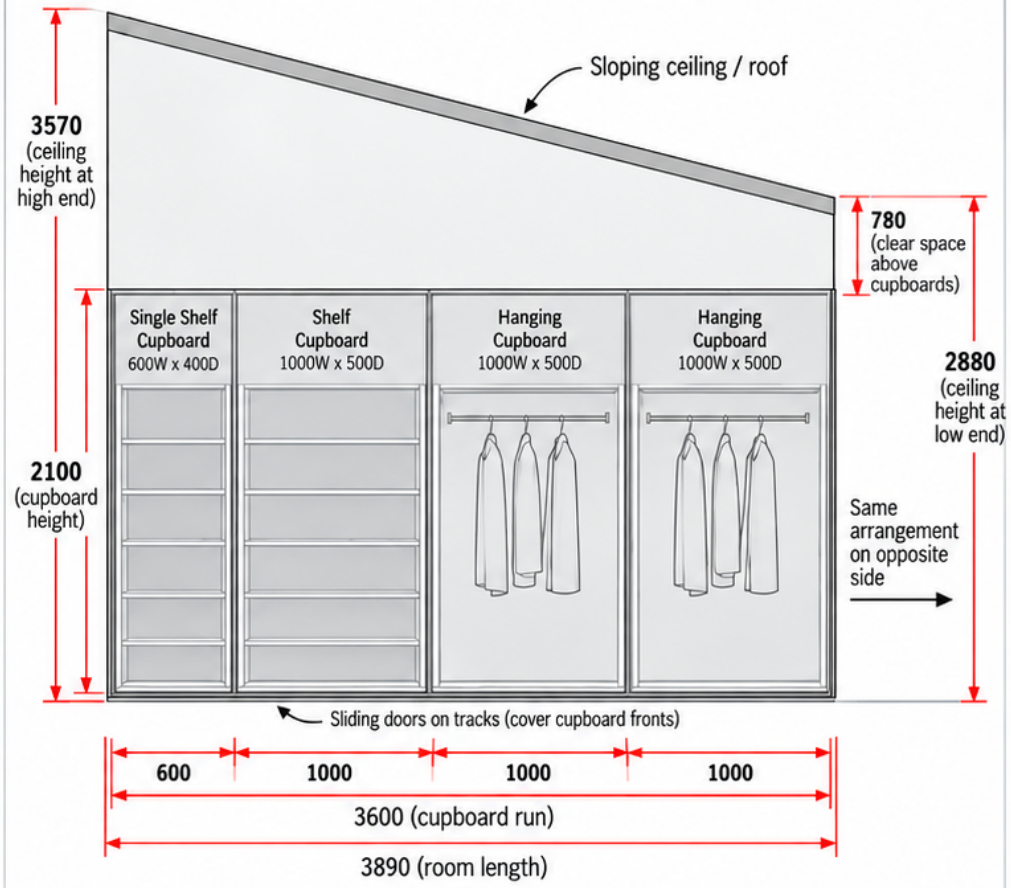

PROJECT SUMMARY

4 x Built-In Hanging Frames	(2100H x 1000W x 500D)
2 x Built-In Shelving Frames	(2100H x 1000W x 500D)
2 x Single Shelf Units	(2100H x 600W x 400D)

Total cupboards: 8

Total carcass cost: R15,392.00

WALK-IN CLOSET

FUNCTIONAL | STYLISH | ORGANISED

Concept drawing only - verify final site dimensions before cutting or fabrication.